

Modem FPT: TW-FP801W, TW-FP504

TW-FP801W là modem 1 port + wifi

TW-FP504 là modem 4 port thường

I. Hình ảnh modem



1. Đèn Power:

- Sáng đứng, màu xanh, nguồn tốt
- Trường hợp khác: nguồn có vấn đề

2. Đèn DSL:

- Tắt: đứt cáp hoặc suy hao quá lớn đường truyền không up được

Nhấp nháy xanh: đang trong quá trình đồng bộ tín hiệu ADSL giữa modem và DSLAM

- Sáng đứng, màu xanh: đường truyền vật lý tốt (có tín hiệu ADSL không đồng nghĩa với suy hao + SNR tốt)

3. Đèn Internet:

- Màu đỏ: không xác thực được account (modem chưa cấu hình)
- Màu xanh: xác thực thành công → có thể sử dụng Internet

4. Đèn LAN:

- Chỉ trạng thái kết nối giữa thiết bị trong mạng LAN với modem qua cáp kết nối (RJ45).

5. Đèn WLAN:

- Màu xanh: Wifi đang được enable
- Tắt: Wifi đang bị disable.

II. Hướng dẫn cấu hình Internet.

1. Cách 1

Mở trình duyệt WEB (IE, Firefox, Google Chrome, Opera ...), gõ vào địa chỉ: <http://192.168.1.1>

- Nhập vào account mặc định: **admin / admin** → ấn Login
- Chọn Interface Setup → Internet
- Đảm bảo các thông số như bên dưới
- Ấn Save để lưu cấu hình

Interface

Quick Start

Interface Setup

Advanced Setup

Access Management

Maintenance

Status

Help

Internet

LAN

Wireless

ATM VC

Virtual Circuit : PVC0

Status : Activated Deactivated

VPI : 0 (range: 0~255)

VCI : 33 (range: 1~65535)

Mặc định đã có sẵn PVC0 0/33 cho Internet, VOD và PVC1 8/35 cho IPTV

QoS

ATM QoS : UBR

PCR : 0 cells/second

SCR : 0 cells/second

MBS : 0 cells

IPv4/IPv6

IP Version : IPv4 IPv4/IPv6 IPv6

Encapsulation

ISP : Dynamic IP Address
 Static IP Address
 PPPoA/PPPoE
 Bridge Mode

PPPoE/PPPoA

Servicename : d483904

Username : hndsl-130320-904

Password :

Encapsulation : PPPoE LLC

Bridge Interface : Activated Deactivated

Nhập username và password từ nhà cung cấp

Connection Setting

Connection : Always On (Recommended)
 Connect On-Demand (Close if idle for 0 minutes)
 Connect Manually

TCP MSS Option : TCP MSS(0:default) 0 bytes

IP Common Options

Default Route : Yes No

IPv4 Address

Get IP Address : Static Dynamic

Static IP Address : 0.0.0.0

IP Subnet Mask : 0.0.0.0

Gateway : 0.0.0.0

TCP MTU Option : TCP MTU(0:default) 0 bytes

NAT : Enable

Dynamic Route : RIP1 Direction : None

Multicast : Disabled

Dual Stack Lite

Enable : Enable Disable

SAVE

Ấn Save để lưu cấu hình

2. Cách 2: dùng Quick Start

Chọn Quick Stat → Ấn Run Wizard

FPT Fpt Telecom

ADSL Router

Quick Start

Quick Start

Interface Setup

Advanced Setup

Access Management

Maintenance

Status

Help

Quick Start

This ADSL Router is ideal for home networking and small business networking. The 'Quick Start' wizard will guide you to configure the ADSL router to connect to your ISP (Internet Service Provider).

RUN WIZARD

Làm theo các bước như bên dưới:

192.168.1.1/wizard/wizardstart.htm

FPT Fpt Telecom


Quick Start

The Wizard will guide you through these four quick steps. Begin by clicking on **NEXT**.

- Step 1. Set your new password
- Step 2. Choose your time zone
- Step 3. Set your Internet connection
- Step 4. Save settings of this ADSL Router

NEXT EXIT

192.168.1.1/wizard/wizardpwd.htm



Quick Start - Password

You may change the **admin** account password by entering in a new password. Click **NEXT** to continue.

New Password :


Confirmed Password :

đổi mật khẩu
đăng nhập, bỏ
qua nếu không
đổi

BACK NEXT EXIT

192.168.1.1/wizard/wizardTZ.htm - Google Chrome

192.168.1.1/wizard/wizardTZ.htm



Quick Start - Time Zone

Select the appropriate time zone for your location and click **NEXT** to continue.

(GMT+07:00) Bangkok, Jakarta, Hanoi chọn múi giờ

BACK NEXT EXIT

192.168.1.1/wizard/wizardConType.htm



Quick Start - ISP Connection Type

Select the Internet connection type to connect to your ISP. Click **NEXT** to continue.

Dynamic IP Address Choose this option to obtain a IP address automatically from your ISP.

Static IP Address Choose this option to set static IP information provided to you by your ISP.


PPPoE/PPPoA Choose this option if your ISP uses PPPoE/PPPoA. (For most DSL users)

Bridge Mode Choose this option if your ISP uses Bridge Mode.

BACK **NEXT** EXIT

192.168.1.1/wizard/wizardPPP.htm - Google Chrome

192.168.1.1/wizard/wizardPPP.htm



Quick Start - PPPoE/PPPoA

Enter the PPPoE/PPPoA information provided to you by your ISP. Click **NEXT** to continue.

Username: **account**



Password: **đăng nhập**

VPI: (0~255)

VCI: (1~65535)

Connection Type:

BACK **NEXT** EXIT

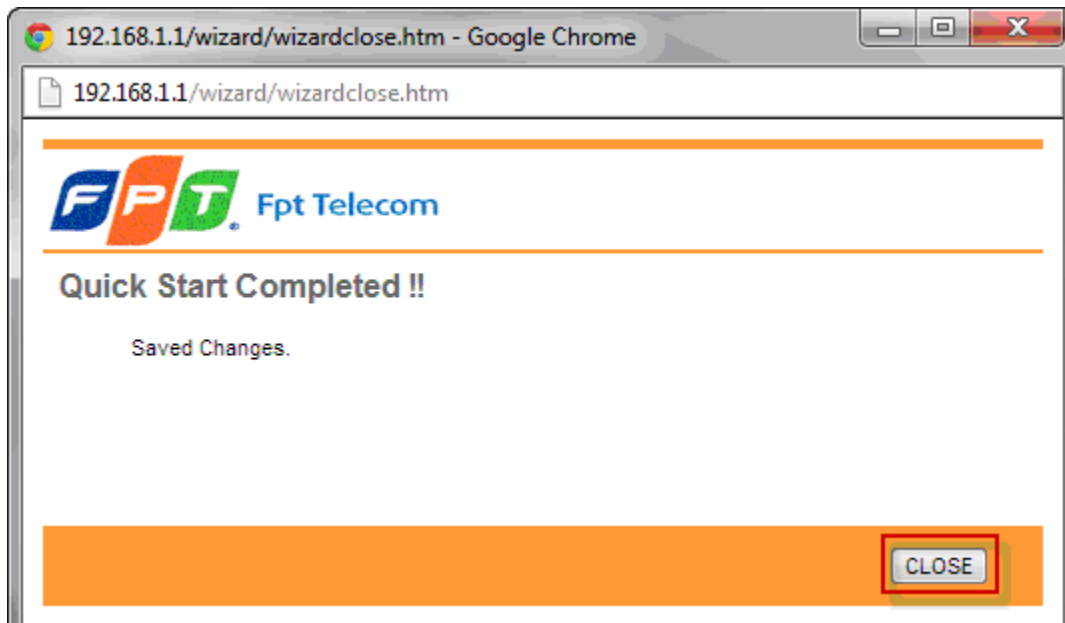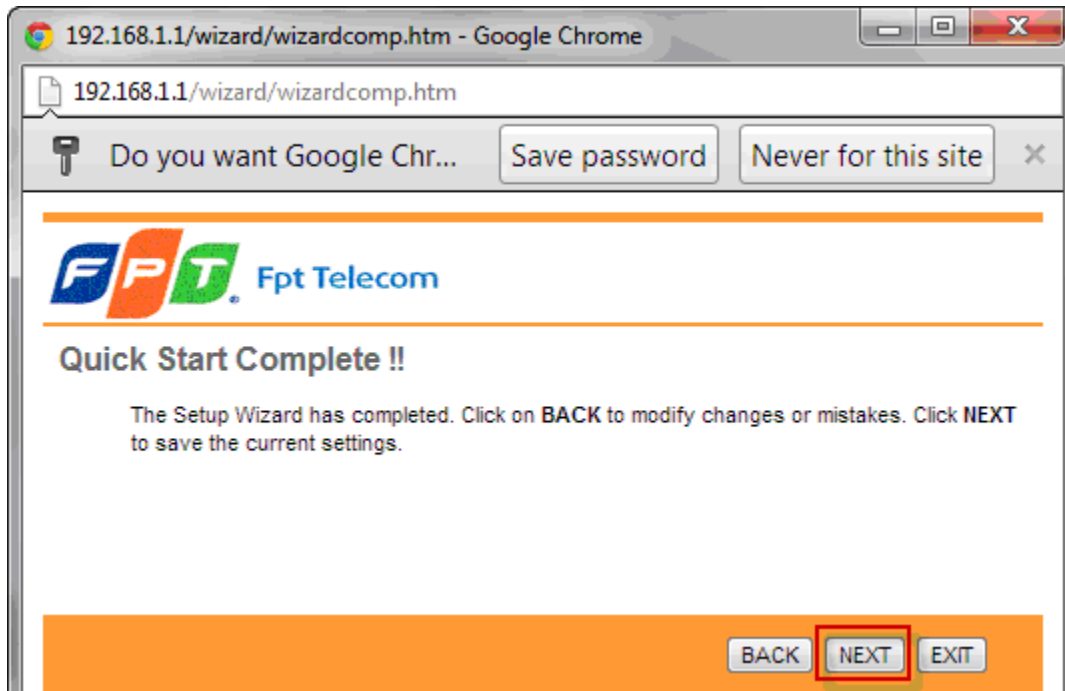

Kết thúc.